

(19) World Intellectual Property Organization  
International Bureau



(43) International Publication Date  
6 September 2002 (06.09.2002)

PCT

(10) International Publication Number  
**WO 02/069119 A1**

(51) International Patent Classification<sup>7</sup>: **G06F 1/00**

(21) International Application Number: PCT/GB02/00845

(22) International Filing Date: 27 February 2002 (27.02.2002)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:

90 1 04585	27 February 2001 (27.02.2001)	CN
0104875.0	28 February 2001 (28.02.2001)	GB
0107740.3	28 March 2001 (28.03.2001)	GB

(71) Applicant (for all designated States except US): **CAMBRIDGE DISPLAY TECHNOLOGY LIMITED** [GB/GB]; Greenwich House, Madingley Rise, Madingley Road, Cambridge CB3 0TX (GB).

(72) Inventors; and

(75) Inventors/Applicants (for US only): **LYON, Peter, John** [GB/GB]; Cambridge Display Technology Limited, Greenwich House, Madingley Rise, Madingley Road, Cambridge

CB3 0TX (GB). **CARTER, Julian, Charles** [GB/GB]; Cambridge Display Technology Limited, Greenwich House, Madingley Rise, Madingley Road, Cambridge CB3 0TX (GB). **BRIGHT, Christopher, John** [GB/GB]; Cambridge Display Technology Limited, Greenwich House, Madingley Rise, Madingley Road, Cambridge CB3 0TX (GB). **CACHEIRO, Martin** [ES/GB]; Cambridge Display Technology Limited, Greenwich House, Madingley Rise, Madingley Road, Cambridge CB3 0TX (GB).


(74) Agents: **SLINGSBY, Philip, Roy et al.**; Page White & Farrer, 54 Doughty Street, London WC1N 2LS (GB).

(81) Designated States (*national*): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, OM, PH, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VN, YU, ZA, ZM, ZW.

(84) Designated States (*regional*): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW),

[Continued on next page]

(54) Title: FORMULATION AND METHOD FOR DEPOSITING A MATERIAL ON A SUBSTRATE

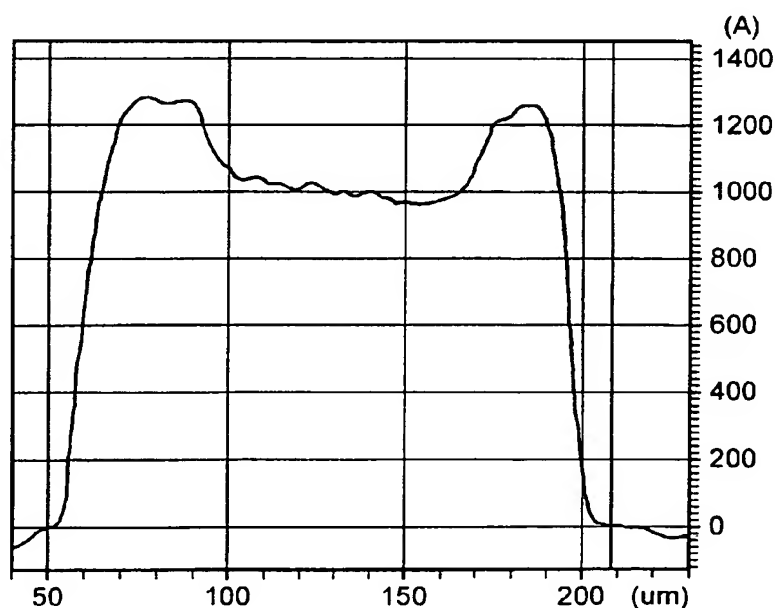

(57) Abstract: A formulation for depositing a material on a substrate, the formulation comprising the material to be deposited on the substrate dissolved in a solvent system comprising a first solvent component having a relatively high boiling point and which exhibits a relatively low solubility with respect to the material to be deposited, and a second solvent component having a relatively low boiling point and which exhibits a relatively high solubility with respect to the material to be deposited.

BEST AVAILABLE COPY

WO 02/069119 A1



Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM),  
European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR,  
GB, GR, IE, IT, LU, MC, NL, PT, SE, TR), OAPI patent  
(BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR,  
NE, SN, TD, TG).

**Published:**

— with international search report

— before the expiration of the time limit for amending the  
claims and to be republished in the event of receipt of  
amendments

*For two-letter codes and other abbreviations, refer to the "Guid-  
ance Notes on Codes and Abbreviations" appearing at the begin-  
ning of each regular issue of the PCT Gazette.*

## FORMULATION AND METHOD FOR DEPOSITING A MATERIAL ON A SUBSTRATE

The present invention relates to a formulation for depositing a material on a substrate, to a method of depositing a material on a substrate particularly by an ink-jet deposition technique, and to a method of producing a light-emitting device by such a deposition method.

As shown schematically in Figure 1, a light-emitting device typically comprises a layer of an electroluminescent polymer 3 sandwiched between a cathode 2 and an anode 1 such that charge carriers can move between the electrodes and the layer of electroluminescent polymer. It is typically produced by depositing a layer of electroluminescent polymer 3 on a glass substrate 5 coated with an anode layer 1 such as a layer of indium-tin oxide (ITO) and depositing a cathode layer 2 such as a calcium layer over the layer of electroluminescent polymer 3. The device may comprise further layers, such as a hole transport layer 4 (such as a layer of doped polyethylene dioxythiophene as described in EP0686662) provided between the anode 1 and the electroluminescent polymer layer 3 and an electron transport layer provided between the cathode and the electroluminescent layer (not provided in the device shown in Figure 1).

An ink-jet technique may be used for depositing the layer of electroluminescent polymer. Such a technique is described in EP0880303A1, whose content is incorporated herein by reference. This technique basically involves the controlled deposition of drops of a solution of the

electroluminescent polymer through a nozzle followed by evaporation of the solvent. This technique is particularly suited to the deposition of patterned layers of the electroluminescent polymer. For example, in some applications, it may be required to have a layer of electroluminescent polymer comprising an ordered array of pixels, wherein each pixel is produced by the deposition of a single drop of solution of the electroluminescent polymer. It is desirable in such cases that the polymer is distributed uniformly in the spot remaining after evaporation of the solvent.

Solutions of the electroluminescent polymer in solvents such as isodurene have conventionally been used in this technique. However, there has been noticed the problem with conventional solvents that after a drop of the deposited solution has dried most of the electroluminescent polymer is deposited as a ring around the edge of the remaining spot leaving only a very thin film of the polymer at the centre of the spot. This can result in relatively poor device efficiency.

It is an aim of the present invention to provide a formulation with which a film of the desired thickness profile can be deposited on a substrate according to a technique involving controlled drop deposition.

According to a first aspect of the present invention, there is provided a formulation for depositing a material on a substrate, the formulation comprising the material to be deposited on the substrate dissolved in a solvent system comprising a first solvent component having a relatively high boiling point and which exhibits a relatively low solubility with respect to the material to

be deposited, and a second solvent component having a relatively low boiling point and which exhibits a relatively high solubility with respect to the material to be deposited.

References to the solubility of each solvent component with respect to the material are references to the solubility of the material in each solvent component.

Ink-jet techniques typically require formulations having a viscosity of up to about 20cps. A typical viscosity for an ink-jet formulation is about 10cps.

The first solvent component may comprise one or more solvents that have a relatively high boiling point and exhibit a relatively low solubility with respect to the material to be deposited (in relation to the second solvent component), and the second solvent component may likewise comprise one or more solvents that have a relatively low boiling point and exhibit a relatively high solubility with respect to the material to be deposited (in relation to the first solvent component).

In one embodiment, the second solvent component has a boiling point in the range of 100 to 200°C and the first solvent component has a boiling point in the range of 130 to 300°C. The difference in boiling point between the first and second solvent components is preferably in the range of 30 to 250°C, further preferably in the range of 70 to 150°C. The solubility of the material to be deposited in the first solvent component is preferably up to 0.5% weight per volume, further preferably in the range of 0.03 to 0.3% weight per volume, and the solubility of the material to be deposited in the second

solvent is preferably greater than 0.5% weight per volume, further preferably greater than 1.5% weight per volume.

The proportion of the first solvent component should preferably be selected such that upon removal of the second solvent component the remaining solution of the material in the first solvent component would be substantially at or above saturation. In one embodiment, the proportion of the first solvent component is in the range of 10 to 60 volume percent, further preferably 20 to 50 volume percent.

In one embodiment, the proportion of the second solvent component is in the range of 40 to 90 volume percent, preferably 50 to 80 volume percent.

According to another aspect of the invention, there is provided a method of depositing a material on a substrate comprising depositing one or more drops of a solution of the material onto the substrate through a nozzle according to an ink-jet technique and drying each deposited drop, wherein the solution of the material comprises a formulation as described above.

The solvent system is selected such that the material begins to precipitate at a relatively early stage in the drying of the drop, i.e. such that precipitation occurs whilst a substantial amount of solvent remains unevaporated.

The solvent system is selected such that the variation in thickness of the dried drop of material on the substrate is less than 80% of the maximum thickness, preferably

less than 50%, and further preferably less than 30%. It is most preferred that the thickness variation is less than 15%.

In one embodiment, the solvent system is selected such that in a formulation having 0.5% w/v of the material to be deposited, the dried drop has a thickness at its centre (i.e. the region enclosed by the ring of increased thickness, if present) of 60 to 140nm, preferably about 70nm to 100nm, which is desirable for EL efficiency and lifetime of an organic light-emitting device.

In the above, the material for deposition on the substrate may, for example, be an organic material such as a polymer or a blend of polymers. In one application, it comprises one or more semiconducting conjugated polymers such as a charge transport polymer or a light-emissive polymer, or a blend of the two.

According to yet another aspect of the present invention, there is provided a method of producing a light-emitting device comprising a layer of an electroluminescent material sandwiched between two electrodes such that charge carriers can move between the electrodes and the layer of electroluminescent material, wherein the layer of electroluminescent material is produced by a method as described above.

According to another aspect of the present invention, there is provided a use of a formulation as described above for reducing or avoiding a ring deposition effect.

Embodiments of the present invention shall be described hereunder, by way of example only, with reference to the accompanying drawings in which:-

Figure 1 is a schematic view of a light-emissive device; Figures 2 and 3 are graphs showing the thickness profile for a spot obtained by an ink-jet technique using a formulation according to embodiments of the present invention;

Figure 4 is a graph showing the thickness profile for a spot of an electroluminescent polymer deposited using a solvent consisting entirely of 1,2-dimethylbenzene;

Figure 5 is a graph showing the thickness profile for a spot obtained by an ink-jet technique using a formulation according to another embodiment of the present invention; and

Figure 6 illustrates some recurring units and polymers.

#### Example 1

A solvent blend was prepared from 60 vol.% 1,2-dimethylbenzene (b.p.: 144.4°C) and 40 vol.%  $\alpha$ -tetralone (b.p.: 255°C). A 0.5% w/v solution of an alternating polymer of 9,9-dioctylfluorene units and benzothiadiazole units (F8BT) having a peak molecular weight of about 266,000 was prepared using this solvent blend. Drops of this solution were deposited by an ink-jet method on the surface of a polyimide substrate that had been modified to lower its surface energy. The drops were allowed to dry at room temperature and humidity ( $20^{\circ}\text{C} \pm 1.0^{\circ}\text{C}$  and 30-40% R.H.), and Dektak measurements of the profile of the dried drops were taken. The results of the measurements are shown in Figure 2.



## Example 2

A solvent blend was prepared from 60 vol.% 1,2-dimethylbenzene and 40 vol.% cyclohexylbenzene. Drops of a 0.5% w/v solution of the same F8BT polymer as Example 1 were deposited on a surface-modified polyimide substrate by an ink-jet method. Dektak measurements of the profile of the dried drops were taken. The results of the measurements are shown in Figure 3.

## Comparative Example

Drops of a 0.5% w/v solution of the same F8BT polymer as Examples 1 and 2 in 1,2-dimethylbenzene were deposited on a surface-modified polyimide substrate by an ink-jet method. Dektak measurements of the profile of the dried drops were taken. The results of the measurements are shown in Figure 4.

As can be seen from a comparison of Figures 2, 3 and 4, the use of the formulations according to the present invention produced dried drops that were significantly improved in terms of uniformity of thickness compared to the comparative example. It is thought that the improved thickness uniformity is a result of the following mechanism. During drying of the drop, the volatile low boiling point solvent evaporates quickly leaving behind a saturated solution in the high boiling point solvent; this in turn causes the polymer to be precipitated rapidly preventing radial flow within the drop and thus creating a relatively uniform distribution of the polymer in the drop.

Furthermore, the improved uniformity of thickness results in an increased thickness at the centre of the drop for the same concentration of material in the formulation. Being able to control the thickness at the centre of the drop is considered to be an important factor in improving the efficiency of a light-emitting device produced by an ink-jet technique. The present invention thus allows an increase in centre thickness without increasing the concentration in the formulation of the material to be deposited. This can have advantages in producing a device having pixels of the desired size at the desired resolution.

Good results have also been achieved using a solvent blend consisting of 40vol.% mixed isomers of xylene (b.p.:138°C); 40 vol.% 1,2,4-trimethylbenzene (b.p.:168°C) and 20 vol.% 3-isopropylbiphenyl (b.p.:295°C). Figure 5 shows a Dektak measurement profile of a dried drop deposited by an ink-jet technique using a 0.5% w/v solution of a polymer blend in this three component solvent system. The polymer blend is relatively highly soluble in the first two, low boiling point solvents relative to the third high boiling point solvent.

## CLAIMS

1. A formulation for depositing a material on a substrate according to an ink-jet technique, the formulation comprising the material to be deposited on the substrate dissolved in a solvent system comprising a first solvent component having a relatively high boiling point and which exhibits a relatively low solubility with respect to the material to be deposited, and a second solvent component having a relatively low boiling point and which exhibits a relatively high solubility with respect to the material to be deposited.
2. A formulation according to claim 1 wherein the second solvent component has a boiling point in the range of 100 to 200°C.
3. A formulation according to claim 1 or claim 2 wherein the first solvent component has a boiling point in the range of 130 to 300°C.
4. A formulation according to claim 1 wherein the difference in boiling point between the first and second solvent components is in the range of 30 to 250°C.
5. A formulation according to claim 4 wherein the difference in boiling point between the first and second solvent components is in the range of 70 to 150°C.
6. A formulation according to any preceding claim wherein the solubility of the material to be deposited in the first solvent component is up to 0.5% weight per volume.
7. A formulation according to claim 6 wherein the solubility of the material to be deposited in the

- first solvent component is in the range of 0.03 to 0.3% weight per volume.
8. A formulation according to any preceding claim wherein the solubility of the material to be deposited in the second solvent component is greater than 0.5% weight per volume.
  9. A formulation according to claim 8 wherein the wherein the solubility of the material to be deposited in the second solvent component is greater than 1.5% weight per volume.
  10. A formulation according to any preceding claim wherein the amount of material in the formulation and the proportion of the first solvent component are selected such that upon removal of the second solvent component the remaining solution of the material in the first solvent component would be at or above saturation.
  11. A formulation according to claim 1 wherein the first solvent component comprises  $\alpha$ -tetralone and the second solvent component comprises 1,2-dimethylbenzene.
  12. A formulation according to claim 1 wherein the first solvent component comprises cyclohexylbenzene and the second solvent component comprises 1,2-dimethylbenzene.
  13. A formulation according to claim 1 wherein the first solvent component comprises xylene and 1,2,4-trimethylbenzene and the second solvent component comprises isopropylbiphenyl.
  14. A method of depositing a material on a substrate comprising depositing one or more drops of a solution of the material onto the substrate through a nozzle according to an ink-jet technique and drying the drops, wherein the solution of the

material comprises a formulation according to any preceding claim.

15. A method according to claim 14 wherein the variation in thickness of the dried drop is less than 30% of the maximum thickness.
16. A method of producing a light-emitting device comprising a layer of an electroluminescent material sandwiched between two electrodes such that charge carriers can move between the electrodes and the layer of electroluminescent material, wherein the layer of electroluminescent material is produced by a method according to claim 14 or claim 15.
17. A use of a formulation according to any of claims 1 to 13 for reducing or avoiding a ring deposition effect.
18. A formulation according to claim 1 excluding 1% w/v of a triblend containing approximately 14wt.% of a ternary polymer containing fluorene (F8) units, benzothiadiazole (BT) units and triarylene units, 56 wt.% of F8BT and 30 wt. % TFB in a solvent mixture containing 20 vol.% 1, 2, 4-trimethylbenzene and 80 vol.% xylene or a solvent mixture containing 50 vol.% 1, 2, 4-trimethylbenzene and 50 vol.% xylene.

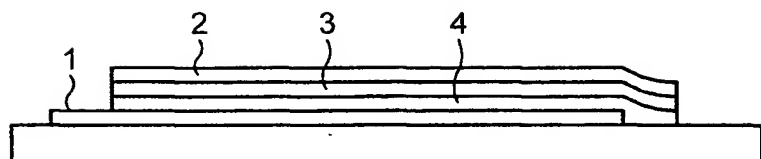


FIG. 1

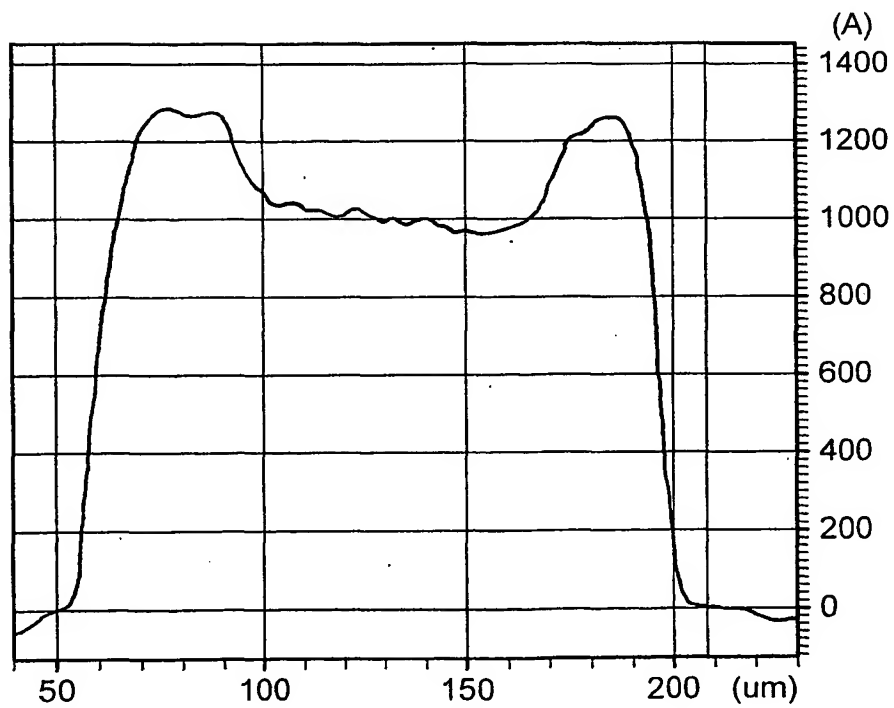


FIG. 2

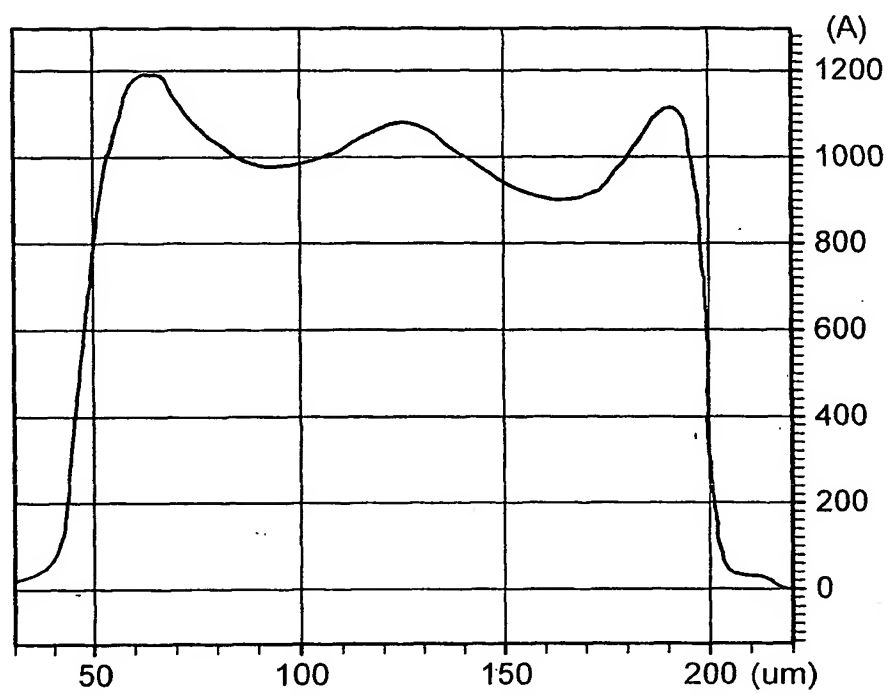


FIG. 3

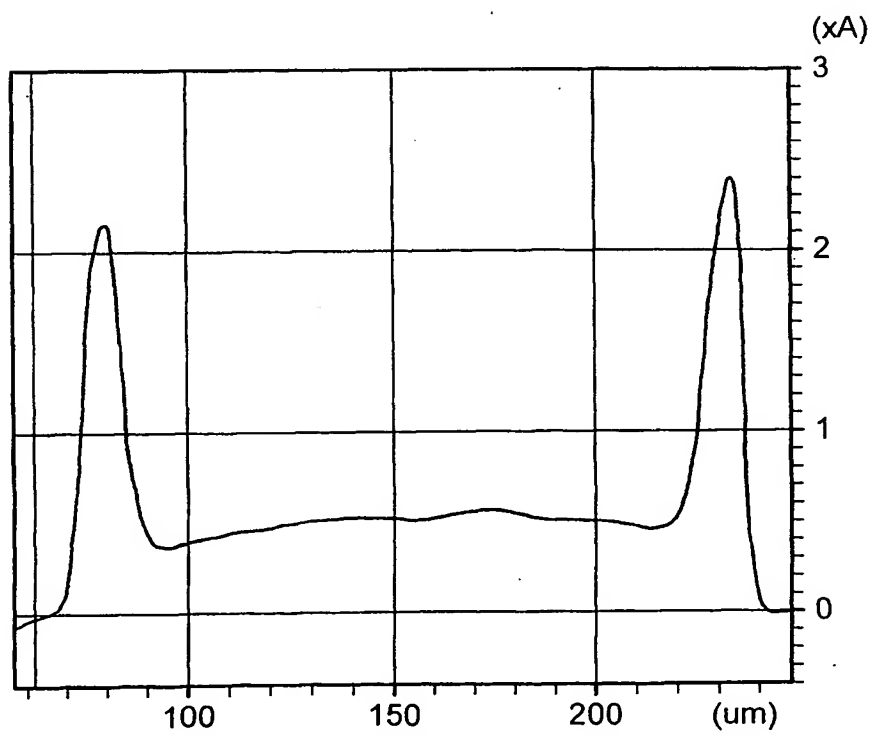


FIG. 4

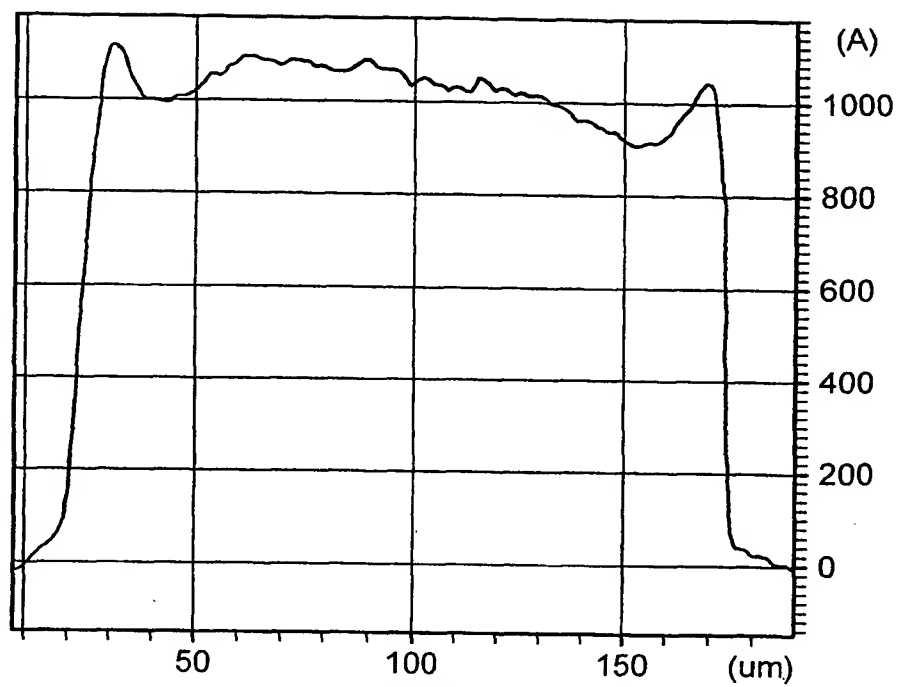


FIG. 5

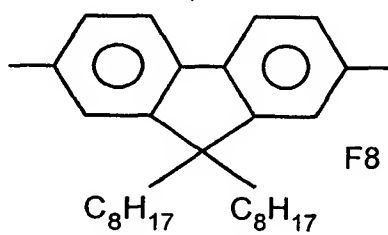


FIG. 6A




FIG. 6B



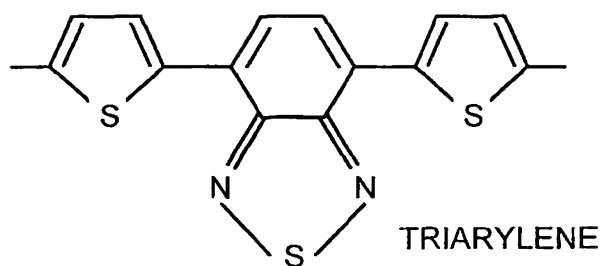


FIG. 6C

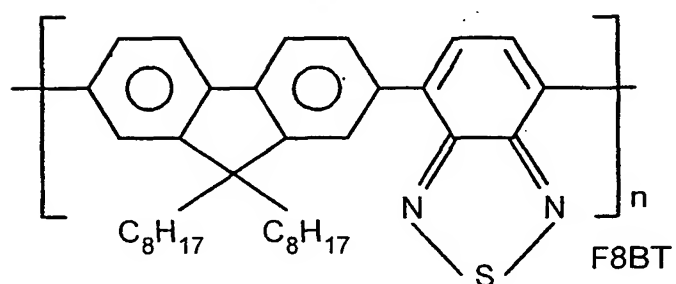


FIG. 6D

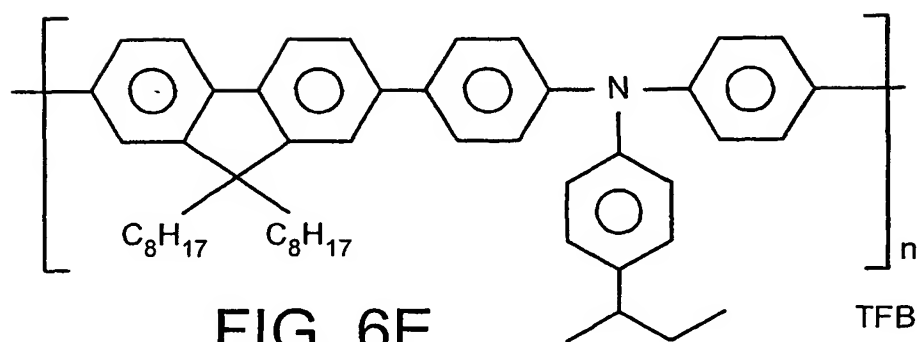


FIG. 6E

**THIS PAGE BLANK (USPTO)**

(19) World Intellectual Property Organization  
International Bureau




(43) International Publication Date  
6 September 2002 (06.09.2002)

PCT

(10) International Publication Number  
**WO 02/069119 A3**

- (51) International Patent Classification<sup>7</sup>: **H01L 51/40**
- (21) International Application Number: **PCT/GB02/00845**
- (22) International Filing Date: 27 February 2002 (27.02.2002)
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data:  
90 1 04585 27 February 2001 (27.02.2001) CN  
0104875.0 28 February 2001 (28.02.2001) GB  
0107740.3 28 March 2001 (28.03.2001) GB
- (71) Applicant (for all designated States except US): **CAMBRIDGE DISPLAY TECHNOLOGY LIMITED** [GB/GB]; Greenwich House, Madingley Rise, Madingley Road, Cambridge CB3 0TX (GB).
- (72) Inventors; and
- (75) Inventors/Applicants (for US only): **LYON, Peter, John** [GB/GB]; Cambridge Display Technology Limited, Greenwich House, Madingley Rise, Madingley Road, Cambridge CB3 0TX (GB). **CARTER, Julian, Charles** [GB/GB]; Cambridge Display Technology Limited, Greenwich House, Madingley Rise, Madingley Road, Cambridge CB3 0TX (GB). **BRIGHT, Christopher, John** [GB/GB]; Cambridge Display Technology Limited, Greenwich House, Madingley Rise, Madingley Road, Cambridge CB3 0TX (GB). **CACHEIRO, Martin** [ES/GB]; Cambridge Display Technology Limited, Greenwich House, Madingley Rise, Madingley Road, Cambridge CB3 0TX (GB).
- (74) Agents: **SLINGSBY, Philip, Roy et al.**; Page White & Farrer, 54 Doughty Street, London WC1N 2LS (GB).
- (81) Designated States (*national*): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, OM, PH, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VN, YU, ZA, ZM, ZW.
- (84) Designated States (*regional*): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).
- Published:**  
— with international search report
- (88) Date of publication of the international search report: 27 February 2003
- (15) Information about Correction:  
**Previous Correction:**  
see PCT Gazette No. 45/2002 of 7 November 2002, Section II
- For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: FORMULATION FOR DEPOSITING A MATERIAL ON A SUBSTRATE USING INK JET PRINTING

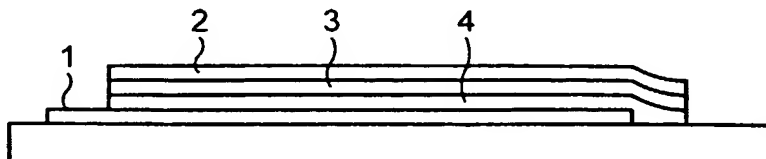

(57) Abstract: A formulation for depositing a material on a substrate, the formulation comprising the material to be deposited on the substrate dissolved in a solvent system comprising a first solvent component having a relatively high boiling point and which exhibits a relatively low solubility with respect to the material to be deposited, and a second solvent component having a

relatively low boiling point and which exhibits a relatively high solubility with respect to the material to be deposited.

## INTERNATIONAL SEARCH REPORT

International Application No.

PCT/GB 02/00845

A. CLASSIFICATION OF SUBJECT MATTER  
IPC 7 H01L51/40

According to International Patent Classification (IPC) or to both national classification and IPC

## B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 7 H01L C09D

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

EPO-Internal, INSPEC, PAJ

## C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	WO 99 29789 A (BAINS GURJEET SINGH ;ROBBIE MAXWELL NEIL (AU); METAL SIGN & LABEL) 17 June 1999 (1999-06-17)	1,14,17
Y	page 7, line 16 - line 23 ---	16
Y	WO 99 12398 A (CAMBRIDGE DISPLAY TECH ;FRIEND RICHARD HENRY (GB)) 11 March 1999 (1999-03-11) the whole document ---	16
X	US 5 091 004 A (TABAYASHI ISAO ET AL) 25 February 1992 (1992-02-25) abstract --- -/--	1



Further documents are listed in the continuation of box C.



Patent family members are listed in annex.

## \* Special categories of cited documents:

- \*A\* document defining the general state of the art which is not considered to be of particular relevance
- \*E\* earlier document but published on or after the International filing date
- \*L\* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- \*O\* document referring to an oral disclosure, use, exhibition or other means
- \*P\* document published prior to the international filing date but later than the priority date claimed

- \*T\* later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
- \*X\* document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
- \*Y\* document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.
- \*G\* document member of the same patent family

Date of the actual completion of the international search

22 August 2002

Date of mailing of the international search report

30/08/2002

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2  
NL - 2280 HV Rijswijk  
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,  
Fax: (+31-70) 340-3016

Authorized officer

Königstein, C

## INTERNATIONAL SEARCH REPORT

International Application No

PCT/GB 02/00845

## C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	WO 00 59267 A (KANBE SADA0 ;SEKI SHUNICHI (JP); SEIKO EPSON CORP (JP)) 5 October 2000 (2000-10-05)	1
P,X	& EP 1 083 775 A (SEIKO EPSON CORP.) 14 March 2001 (2001-03-14) paragraph '0052! - paragraph '0057! -----	1
A	WO 99 54385 A (DOW CHEMICAL CO) 28 October 1999 (1999-10-28) the whole document -----	18

# INTERNATIONAL SEARCH REPORT

Information on patent family members

International Publication No  
PCT/GB 02/00845

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
WO 9929789	A	17-06-1999	WO 9929789 A1	17-06-1999
			AU 739059 B2	04-10-2001
			AU 5185098 A	28-06-1999
WO 9912398	A	11-03-1999	WO 9912398 A1	11-03-1999
US 5091004	A	25-02-1992	JP 63264684 A	01-11-1988
WO 0059267	A	05-10-2000	CN 1310930 T	29-08-2001
			EP 1083775 A1	14-03-2001
			WO 0059267 A1	05-10-2000
WO 9954385	A	28-10-1999	US 6309763 B1	30-10-2001
			CN 1263542 T	16-08-2000
			EP 0988337 A1	29-03-2000
			JP 2002506481 T	26-02-2002
			WO 9954385 A1	28-10-1999
			US 2001026878 A1	04-10-2001

## CORRECTED VERSION

(19) World Intellectual Property Organization  
International Bureau




(43) International Publication Date  
6 September 2002 (06.09.2002)

PCT

(10) International Publication Number  
**WO 02/069119 A2**

- (51) International Patent Classification<sup>7</sup>: **G06F 1/00**
- (21) International Application Number: **PCT/GB02/00845**
- (22) International Filing Date: 27 February 2002 (27.02.2002)
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data:  
90 1 04585 27 February 2001 (27.02.2001) CN  
0104875.0 28 February 2001 (28.02.2001) GB  
0107740.3 28 March 2001 (28.03.2001) GB
- (71) Applicant (*for all designated States except US*): **CAMBRIDGE DISPLAY TECHNOLOGY LIMITED** [GB/GB]; Greenwich House, Madingley Rise, Madingley Road, Cambridge CB3 0TX (GB).
- (72) Inventors; and
- (75) Inventors/Applicants (*for US only*): **LYON, Peter, John** [GB/GB]; Cambridge Display Technology Limited, Greenwich House, Madingley Rise, Madingley Road, Cambridge CB3 0TX (GB). **CARTER, Julian, Charles** [GB/GB]; Cambridge Display Technology Limited, Greenwich House, Madingley Rise, Madingley Road, Cambridge CB3 0TX (GB). **BRIGHT, Christopher, John** [GB/GB]; Cambridge Display Technology Limited, Greenwich House, Madingley Rise, Madingley Road, Cambridge CB3 0TX (GB). **CACHEIRO, Martin** [ES/GB]; Cambridge Display Technology Limited, Greenwich House, Madingley Rise, Madingley Road, Cambridge CB3 0TX (GB).
- (74) Agents: **SLINGSBY, Philip, Roy et al.**; Page White & Farrer, 54 Doughty Street, London WC1N 2LS (GB).
- (81) Designated States (*national*): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, OM, PH, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VN, YU, ZA, ZM, ZW.
- (84) Designated States (*regional*): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).
- Published:**  
— *without international search report and to be republished upon receipt of that report*
- (48) Date of publication of this corrected version:  
7 November 2002
- (15) Information about Correction:  
see PCT Gazette No. 45/2002 of 7 November 2002, Section II
- For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.*

(54) Title: FORMULATION AND METHOD FOR DEPOSITING A MATERIAL ON A SUBSTRATE

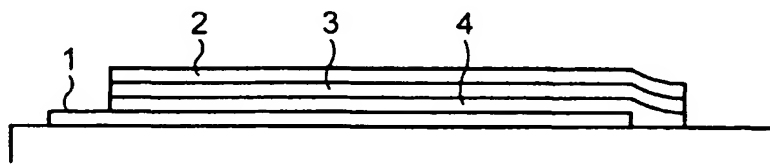

the material to be deposited, and a second solvent component having a relatively low boiling point and which exhibits a relatively high solubility with respect to the material to be deposited.

(57) Abstract: A formulation for depositing a material on a substrate, the formulation comprising the material to be deposited on the substrate dissolved in a solvent system comprising a first solvent component having a relatively high boiling point and which exhibits a relatively low solubility with respect to

**THIS PAGE BLANK (USPTO)**